


## Channel Nuts



### P1010, P1012S, P5510

WITH SPRING



### P3008, P1012, P3010

WITHOUT SPRING

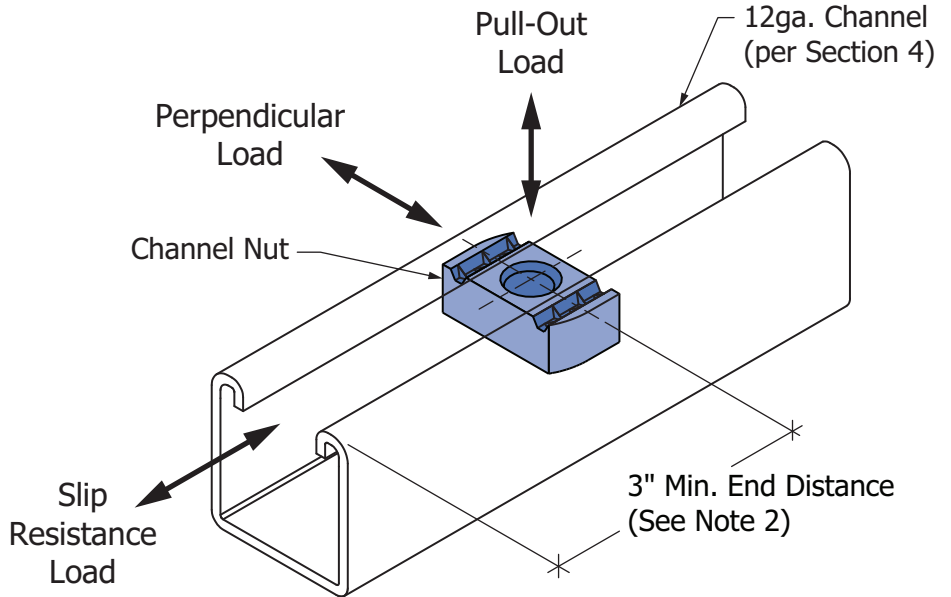


**Notes:**

- 1) Fitting and Cap Screw not shown for clarity. See Section 5a for full installation requirements.
- 2) For end distances less than 3", use Wolf Washer. Refer to Page 5b.1.
- 3) This information applies only to Unistrut brand Channel Nuts. All Unistrut Channel Nuts are stamped with the name "UNISTRUT".

### P1010T

TOP GRIP



Part Numbers	Thread Size	Use With
P3008*	3/8"	Any Channel in OPM
P1010	1/2"	P1000, P1001
P3010	1/2"	Any Channel in OPM
P5510	1/2"	P5500, P5501, P5000, P5001
P1010T	1/2"	Any Channel in OPM
P1012	5/8"	Any Channel in OPM
P1012S	5/8"	P1000, P1001

\*P3008 is not to be used with a seismic brace

Material/Finish Specifications P1010T
<b>Material:</b> ASTM B783, FN-0205-80HT
<b>Finish:</b> ASTM B633 Type III SC1 (EG)
Case Hardened

Material/Finish Specifications P1012S, P1012
<b>Material:</b> ASTM A675 GR 60
<b>Finish:</b> ASTM B633 Type III SC1 (EG)
Case Hardened

Material/Finish Specifications P1010, P5510, P3010, P3008
<b>Material:</b> ASTM A576 GR 1015 Modified
<b>Finish:</b> ASTM B633 Type III SC1 (EG)
Case Hardened



16100 S. Lathrop Ave  
Harvey, IL 60426  
Toll-Free: (800) 882-5543

[www.unistrutseismic.com](http://www.unistrutseismic.com)

Structural Engineer: Rami Elhassan  
California SE No. 3930

Page:

**6a.1**